

STIRLING[®]

118L OUTDOOR BEVERAGE CHILLER




Features:



Energy efficient
internal LED
lighting



Double glazed heated
glass door prevents
condensation forming



Convenient
temperature range
from 0°-10° C




Cater for all occasions
with an impressive
178 can (355ml) capacity

Quick Start Guide

Installing the bar fridge (refer to user manual, page 9-10)

- Two person installation: Use two or more able-bodied people to move and install the beverage chiller. Failure to do so can result in back or other injury.
- Before connecting the beverage chiller to the power source, let it stand upright for approximately 8 hours. This will allow any refrigerant gasses that may have been disturbed during the transportation process to settle and reduce the possibility of a malfunction in the cooling system from handling during transport.

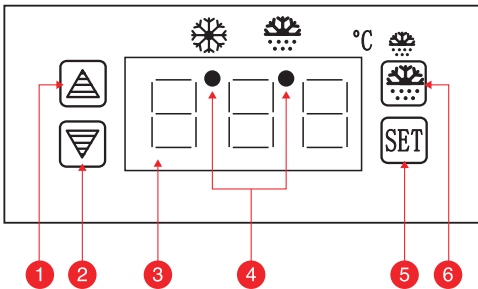


Your Beverage Chiller Controls

- 1 **Temperature Control: Up Button**
- 2 **Temperature Control: Down Button**
Press the Up or Down buttons to increase or decrease the temperature inside the beverage chiller cabinet in 1° intervals.
- 3 **LED Display**
- 4 **Indicator Lights**
Indicator on the left relates to the Cooling
Symbol: ❄️
Indicator on the right relates to the Defrost
Symbol: ❄️+
- 5 **Set Temperature Button**
Press this button to set the desired temperature.
- 6 **Defrost Button**
Press this button to manually activate the defrost cycle.



Positioning the Shelves

Position the shelf supports inside the racks on the sides at your required level. You can then place the shelves firmly on the supports and begin to load your contents.

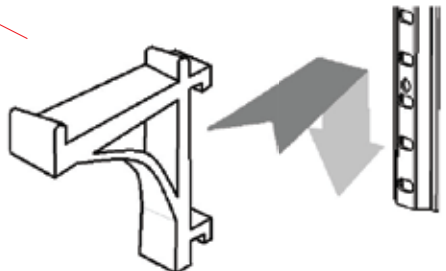

Model Number SOBF118

Capacity 118L

Warranty 3 years

For more information please call 1300 11 43 57
or visit www.stirlingappliances.com.au